
	PART No.	DESCRIPTION	SPECIFICATION
	DLS-4500-120	<ul style="list-style-type: none"> <li>4 channel x 500 W Dimmer or switch pack</li> <li>Dimmer or switch selection with adjustable Switch level</li> <li>Universal dimmers for LED, Fluorescent, Low-Voltage Transformers</li> <li>120VAC</li> <li>Suitable for dimming Triac dimmable LED &amp; CFL Bulbs</li> </ul>	<ul style="list-style-type: none"> <li>Heavy-Duty Outputs, Dims 4 x 4 AMP loads</li> <li>(4 dimmers x 500W @120VAC).</li> <li>Active DC component protection for inductive loads</li> <li>Suitable for inductive Loads at Full Rating</li> <li>0-10V analog lighting controllers compatible</li> </ul>

**Features**

- Designed for Architectural dimming from standard 0-10V wall dimmers or controllers
- Use with Dialog WDB-3314

**Operation**

Enclosure Installation Surface mount the dimmer pack in a well ventilated area where the ambient temperature does not exceed 104° F for full load operation. Allow 2" of side clearance for proper air circulation and servicing. Installation clearance shall meet local and/or NEC code requirements. Enclosures may be attached to the wall or other mounting surface by holes in the heat sink flanges. Refer to the drawings below (FIGURE 3) for the correct dimensions. Conduit shall be pulled to the top of the dimmer packs.

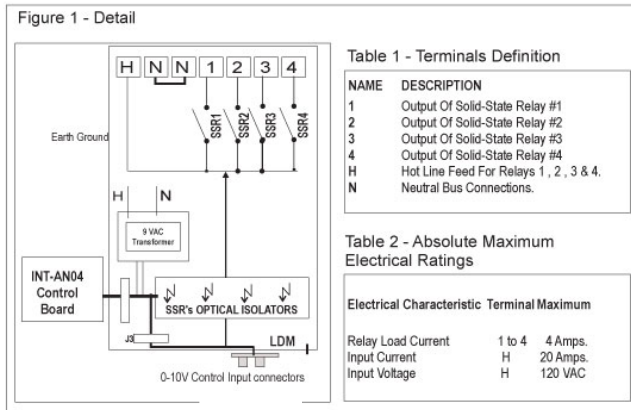

**DIMENSIONS & MOUNTING**

- Compact Size, 11.25" H x 4.5" W x 3.75" D
- Wall-Mount aluminum enclosure




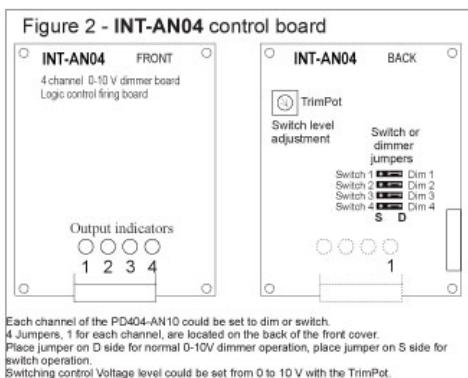


Figure 3 - Dimensional Diagram

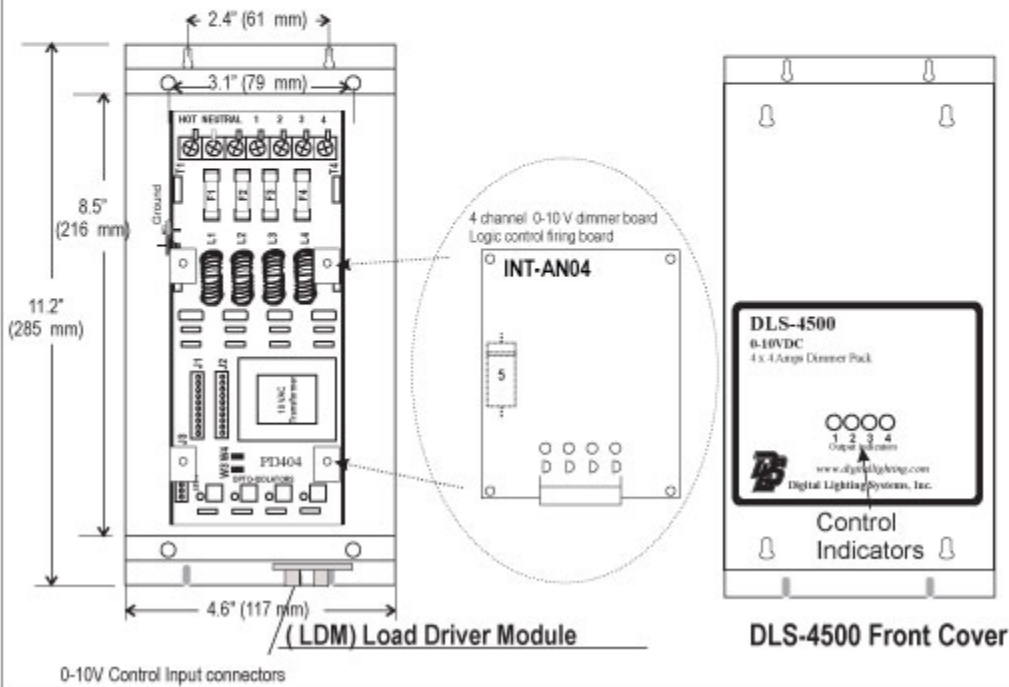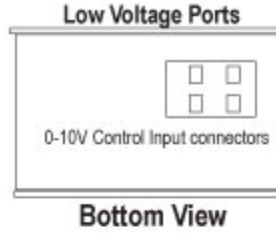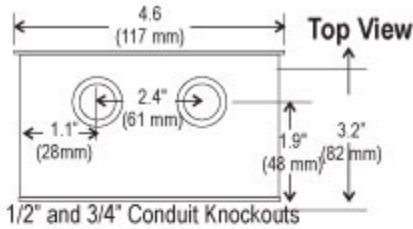

DLS-4500 General Wiring Instructions

Wiring Notes

- 0 DO NOT EXCEED 480 W (4 Amps. ) per each dimmer @ 120VAC.
- 0 All wiring From control to dimmers is low voltage (NEMA Class 2)
- 0 DLS-4500 dimmer packs may be fed by one 20 A (maximum) branch circuit and may have up to Four separately dimmed loads.
- 0 CAUTION: DO NOT attempt to parallel outputs to increase capacity.
- 0 Installations must conform to local and/or NEC code requirements.
- 0 Each load must have its own Neutral wire for full load operation.
- 0 All line voltage wires must have copper conductors of adequate Gauge with 90° C wire insulation.
- 0 POWER EACH LOAD DIRECTLY BEFORE CONNECTING IT TO THE DLS-4500 TO ENSURE PROPER WIRING.

Figure 4 - DLS-4500 Typical Control Wiring

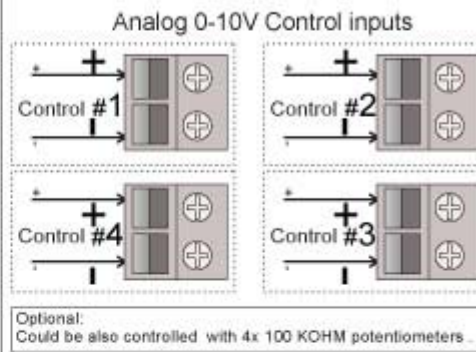


Figure 5 - DLS-4500 Typical 120 VAC Wiring.

**CAUTION:**  
Fuses 1 to 4 are 5 Amps/250V ; quick blow to be replaced by certified electrician.

For Full Load Operation Use:  
#12 AWG copper conductor wire for Line & Neutral Feeds,  
#14 AWG copper conductors to each load.  
Follow N.E.C. requirements  
Max. Per Load: 4 Amperes (480 W at 120 VAC).

From Electrical Distribution Panel  
**1x20 A - 120 VAC Breaker**

