



|  |
|--|
| <b>Project Name:</b> _____<br><b>Part Number:</b> _____ <b>Date:</b> _____ |
|--|

**Features**

- 0 – 65,000 lux
- Low profile
- 30° Tilt Lens
- Configuration Dial
- Plug 'N Control® out-of-the-box






ASHRAE 90.1 Compliant

The indoor ceiling mount closed-loop-control (CLC) Daylight Sensor is an integral part of a Dialog® Room Controller system as it provides real-time light level input to support natural daylight harvesting. Natural Daylight Harvesting uses natural and in-room lighting to automatically provide a predetermined level of light in the room. This maximizes the use of available natural light while minimizing use of in-room lighting, thereby reducing energy consumption.

A tilting lens helps direct the sensor to, or away from, specific areas. Setting the light point on the Daylight Sensor is easily done with an on-board set-point dial. With only a set-point adjustment, the Dialog Room Controller system is Plug 'N Control ready right out-of-the box by connecting to the Dialog Room Controller via our simple 2-wire, non-polarized low voltage (18/2 AWG) data/power bus, minimizing commissioning time.

| PART NUMBER | DESCRIPTION                                 |
|-------------|---|
| WPP-INT     | Interior Daylight Sensor Single Room        |
| WPP-INT-1A  | Interior Daylight Sensor Single Room A Type |
| WPP-INT-1B  | Interior Daylight Sensor Single Room B Type |
| WPP-INT-2A  | Interior Daylight Sensor Two Room A Type    |
| WPP-INT-2B  | Interior Daylight Sensor Two Room B Type    |

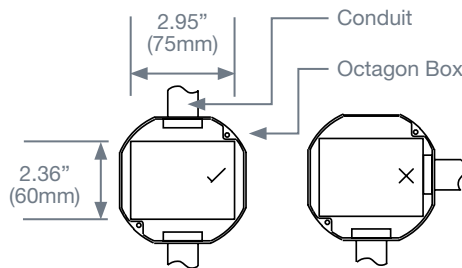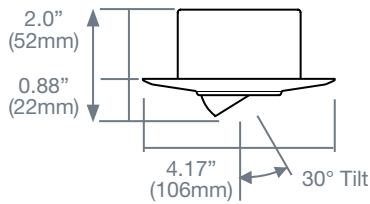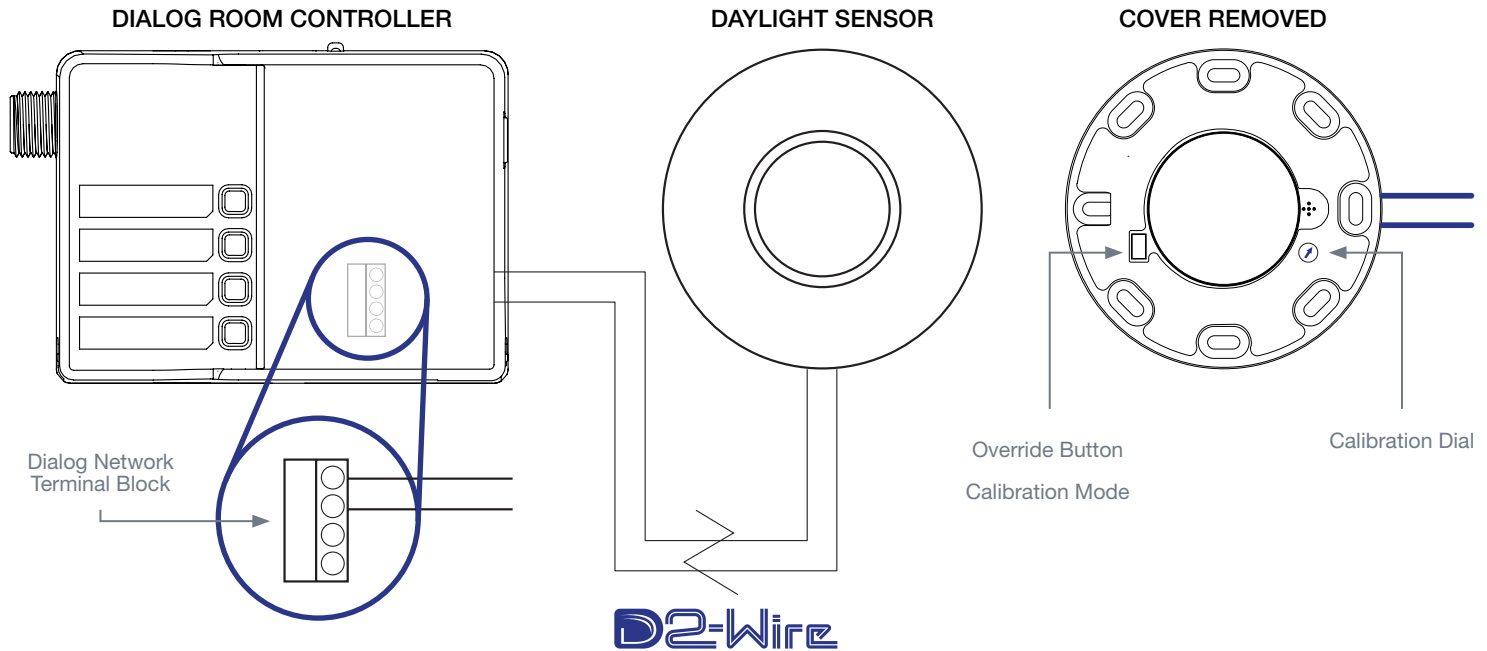

Dialog Ceiling Mount Sensors will fit a standard (2-1/8" deep) octagon box. The can also be attached with the included mounting ring. For octagon box installations, conduits should be attached to the sides with the larger wiring space.

|                           |  |
|---------------------------|--|
| <b>FUNCTIONALITY</b>      | <ul style="list-style-type: none"> <li>Natural Daylight Harvesting via closed loop control dimming</li> <li>Range: 0 to 65,000 lux</li> </ul>  |
| <b>CURRENT DRAW</b>       | <ul style="list-style-type: none"> <li>3mA</li> </ul>  |
| <b>POWER REQUIREMENTS</b> | <ul style="list-style-type: none"> <li>150' Clear line of site. 50' through standard walls (distances may vary based on location and environment. Additional devices may be required at time of commissioning to ensure Bluetooth network integrity.)</li> </ul> |
| <b>ENVIRONMENT</b>        | <ul style="list-style-type: none"> <li>14°F to 140°F (-10°C to +60°C)</li> <li>Stationary, non-vibrating, non-corrosive atmosphere and non-condensing humidity</li> </ul>  |
| <b>POWER</b>              | <ul style="list-style-type: none"> <li>Powered by Dialog Room Controller via 2-wire, non-polarized low voltage (24Vac) data bus</li> </ul>   |
| <b>WARRANTY</b>           | <ul style="list-style-type: none"> <li>1 year</li> </ul>   |